

Scan for Location

Scan for Catalogue

www.aureliusfiredoor.com | info@aureliusfiredoor.com

Aurelius Fire Door Rajkot- Morbi Highway,
Bhimnath Mahadev Road, Om Balaji Ind. Estate, Plot No. 4, At Lajai, Morbi - 363650.

ISI CERTIFIED
FIRE SAFETY SOLUTIONS

Protecting **Lives.** Securing **Properties.**





www.aureliusfiredoor.com | info@aureliusfiredoor.com

AURELIUS



ABOUT US

Aurelius Fire Door LLP is a part of the Aurelius Group of Companies, operating under the umbrella of Aurelius Edge Overseas Private Limited. With a commitment to **quality, innovation, and safety**, we focus on manufacturing **fire door solutions** designed to support passive fire protection in modern buildings and infrastructure projects across India.

We understand that fire safety is an essential part of every building. Our objective is to provide reliable, durable, and application-oriented fire door solutions that help protect lives, property, and critical infrastructure. We aim to build long-term relationships with architects, consultants, contractors, builders, project management consultants (PMCs), and building owners through quality products and professional service.

Our product portfolio **includes 30, 60, 90, and 120-minute fire door solutions**, subject to the applicable tested and approved door configurations. Our range **includes steel fire doors, glazed fire doors, fire doors with fixed glazed partitions, shaft doors, clean room doors, fire curtains, and fire-retardant cable coating solutions.**

At **Aurelius Fire Door LLP**, we emphasise manufacturing quality, dimensional accuracy, suitable hardware selection, reliable finishing, and consistency in production. We aim to **support our clients from product selection** and technical specifications to project coordination, supply, and installation guidance, as applicable.

AURELIUS

OUR MISSION

Our mission is to deliver dependable fire door and passive fire protection solutions that contribute to safer buildings and better-protected environments. We strive to combine quality manufacturing, technical knowledge, practical design, and competitive value to meet the evolving requirements of the construction industry.

We are committed to continuous improvement, customer satisfaction, and responsible manufacturing practices while working towards solutions that align with applicable fire safety requirements and project specifications.

OUR VISION

Our vision is to establish Aurelius Fire Door LLP as a trusted name in the Indian fire protection industry by delivering quality-driven products, professional service, and innovative solutions for residential, commercial, industrial, and institutional projects.

We aspire to contribute to a safer built environment through dependable products, strong business relationships, and a culture of continuous improvement.

OUR CORE VALUES

We focus on consistent manufacturing quality, durable materials, and dependable product performance.

Index

SINGLE FIRE DOOR WITH VISION PANEL 04
DOUBLE FIRE DOOR WITH VISION PANEL 06
SAMI GLAZED SINGLE FIRE DOOR 08
SAMI GLAZED FIRE DOOR 10
FULL GLAZED FIRE DOOR 12
FHC DOOR & HOSE REEL CABINET 18

SINGLE FIRE DOOR WITH VISION PANEL

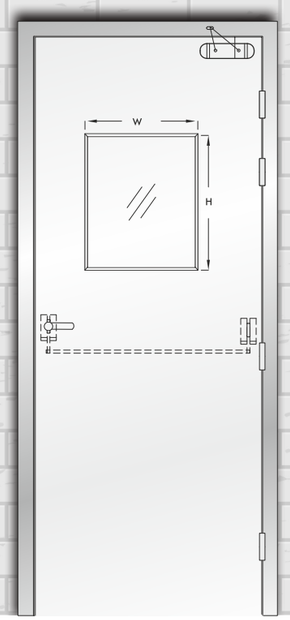

Door Specification :

Door Type	:	Steel Fire Rated Door
Fire Rating	:	60 mins/120 mins
Shutter Thickness	:	46mm
Criteria	:	Stability, Integrity & with Insulation
Testing Standards	:	BS 476 PART 20-22, IS 3614-2021
Frame Size	:	100mm x 57mm Single Rebate 143mm x 57mm Double Rebate

Construction Details :

- Steel Frame Profile Design
- Frame Thickness :- 1.60 mm Galvanized Steel
- Shutter Sheet Thickness :- 1.2 mm Galvanized Steel
- Vision Panel :- 2hrs. Fire rated Toughened clear glass (Optional)
- Shutter Thickness :- 46 mm
- Shutter Infill Insulation :- Fire rated Insulation
- Finish powder coated in desired shade / Wooden Finish

Recommended Finishes :

- Powder Coating in desired RAL Shade Code
- Wooden Finish



Inner Filling



WOOL INSULATION

Anchor Cover



Frame & Shutter Section



Frame Section



SINGAL REBATE 1.6MM STEEL FRAME

Door Handing



Door Hardware



S.S. BB Hinges



Mortice Dead Lock



D/H Door Handle



Door Closer



Vision Lite



Mortice Sash Lock & Lever Handle



Panic Exit Device

Door Orientation



Door Opening Style - (A)
Right Hand Inside Opening



Door Opening Style - (B)
Right Hand Outside Opening



Door Opening Style - (C)
Left Hand Inside Opening



Door Opening Style - (D)
Left Hand Outside Opening

Colour Shades



RAL 1013
OYSTER WHITE



RAL 5015
SKY BLUE



RAL 3020
TRAFFIC RED



RAL 5012
LIGHT BLUE



RAL 7035
LIGHT GREY



RAL 7040
WINDOW GREY



Ral 7042
TRAFFIC GREY A



RAL 9001
CREME



RAL 9002
GREY WHITE



RAL 9003
SIGNAL WHITE



RAL 9010
PURE WHITE



RAL 9016
TRAFFIC WHITE

Vision Lite Options



No View Glass



Rectangular View Glass
200x300 mm



Square View Glass
300x300 mm



Narrow View Glass
150x600 mm

DOUBLE FIRE DOOR WITH VISION PANEL

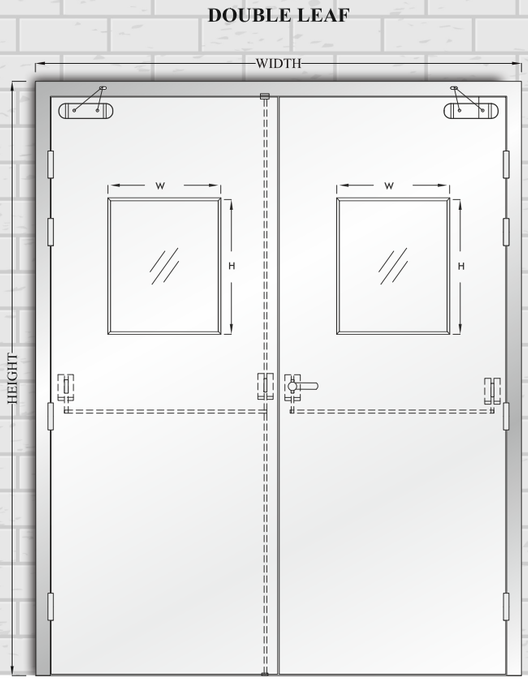



Inner Filling



WOOL INSULATION

Anchor Cover



Typical Detail Of Jamb



Frame Section



DOUBLE REBATE 1.6MM STEEL FRAME

Door Handing



Door Specification :

Door Type	:	Steel Fire Rated Door
Fire Rating	:	60 mins/120 mins
Shutter Thickness	:	46mm/50mm
Criteria	:	Stability, Integrity & with Insulation Material
Testing Standards	:	BS 476 PART 20-22, IS 3614-2021
Frame Size	:	100mm x 57mm

Construction Details :

- Steel Frame Profile Design
- Frame Thickness :- 1.60 mm Galvanized Steel
- Shutter Sheet Thickness :- 1.2 mm Galvanized Steel
- Vision Panel :- 2hrs. Fire rated Toughened clear glass (Optional)
- Shutter Thickness :- 46 mm
- Shutter Infill Insulation :- Fire rated Insulation
- Finish powder coated in desired shade

Recommended Finishes :

- Powder Coating in desired RAL Shade Code
- Wooden Finish

Door Hardware



S.S. BB Hinges



Mortice Dead Lock



D/H Door Handle



Door Closer



Vision Lite



Mortice Sash Lock & Lever Handle



Panic Exit Device

Door Orientation



Door Opening Style - (A)
Right Hand Inside Opening



Door Opening Style - (B)
Right Hand Outside Opening



Door Opening Style - (C)
Left Hand Inside Opening



Door Opening Style - (D)
Left Hand Outside Opening

Colour Shades



RAL 1013
OYSTER WHITE



RAL 5015
SKY BLUE



RAL 3020
TRAFFIC RED



RAL 5012
LIGHT BLUE



RAL 7035
LIGHT GREY



RAL 7040
WINDOW GREY



Ral 7042
TRAFFIC GREY A



RAL 9001
CREME



RAL 9002
GREY WHITE



RAL 9003
SIGNAL WHITE



RAL 9010
PURE WHITE



RAL 9016
TRAFFIC WHITE

Vision Lite Options



No View Glass



Rectangular View Glass
200x300 mm



Square View Glass
300x300 mm



Narrow View Glass
150x600 mm

SAMI GLAZED SINGLE FIRE DOOR

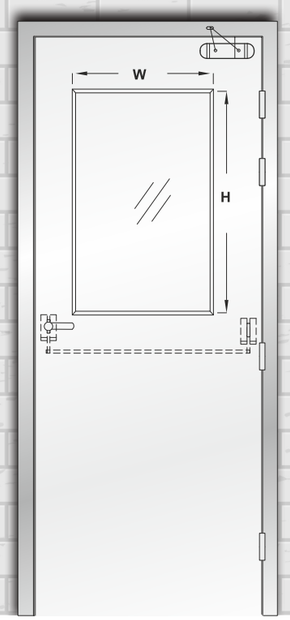

Door Specification :

Door Type	:	Sami Glazed Fire Rated Door
Fire Rating	:	60 mins/120 mins
Shutter Thickness	:	46mm/50mm
Criteria	:	Stability, Integrity & with Insulation Material
Testing Standards	:	BS 476 PART 20-22, IS 3614-2021
Frame Size	:	100mm x 57mm Single Rebate

Construction Details :

- Steel Frame Profile Design
- Frame Thickness :- 1.60 mm Galvanized Steel
- Shutter Sheet Thickness :- 1.2 mm Galvanized Steel
- Vision Panel :- 2hrs. Fire rated Toughened clear glass (Optional)
- Shutter Thickness :- 46 mm
- Shutter Infill Insulation :- Fire rated Insulation
- Finish powder coated in desired shade

Recommended Finishes :

- Powder Coating in desired RAL Shade Code
- Wooden Finish



Inner Filling



WOOL INSULATION

Anchor Cover



Typical Detail Of Jamb



Frame Section



SINGAL REBATE 1.6MM STEEL FRAME

Door Handing



Door Hardware



S.S. BB Hinges



Mortice Dead Lock



D/H Door Handle



Door Closer



Vision Lite



Mortice Sash Lock & Lever Handle



Panic Exit Device

Door Orientation



Door Opening Style - (A)
Right Hand Inside Opening



Door Opening Style - (B)
Right Hand Outside Opening



Door Opening Style - (C)
Left Hand Inside Opening



Door Opening Style - (D)
Left Hand Outside Opening

Colour Shades



RAL 1013
OYSTER WHITE



RAL 5015
SKY BLUE



RAL 3020
TRAFFIC RED



RAL 5012
LIGHT BLUE



RAL 7035
LIGHT GREY



RAL 7040
WINDOW GREY



Ral 7042
TRAFFIC GREY A



RAL 9001
CREME



RAL 9002
GREY WHITE



RAL 9003
SIGNAL WHITE



RAL 9010
PURE WHITE



RAL 9016
TRAFFIC WHITE

Vision Lite Options



No View Glass



Rectangular View Glass
200x300 mm



Square View Glass
300x300 mm



Narrow View Glass
150x600 mm

SAMI GLAZED FIRE DOOR

DOUBLE LEAF

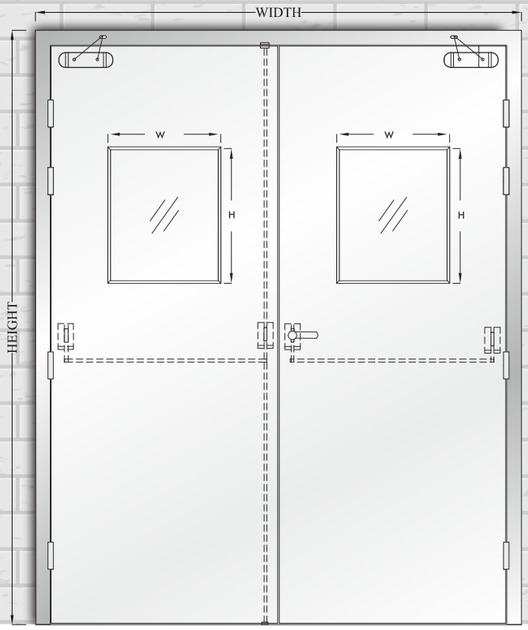

Door Specification :

Door Type	:	Sami Glazed Fire Rated Door
Fire Rating	:	60 mins/120 mins
Shutter Thickness	:	46mm/50mm
Criteria	:	Stability, Integrity & with Insulation Material
Testing Standards	:	BS 476 PART 20-22, IS 3614-2021
Frame Size	:	143mm x 57mm Double Rebate

Construction Details :

- Steel Frame Profile Design
- Frame Thickness :- 1.60 mm Galvanized Steel
- Shutter Sheet Thickness :- 1.2 mm Galvanized Steel
- Vision Panel :- 2hrs. Fire rated Toughened clear glass (Optional)
- Shutter Thickness :- 46 mm
- Shutter Infill Insulation :- Fire rated Insulation
- Finish powder coated in desired shade

Recommended Finishes :

- Powder Coating in desired RAL Shade Code
- Wooden Finish



Inner Filling



WOOL INSULATION

Anchor Cover



Typical Detail Of Jamb



Frame Section



DOUBLE REBATE 1.6MM STEEL FRAME

Door Handing



Door Hardware



S.S. BB Hinges



Mortice Dead Lock



D/H Door Handle



Door Closer



Vision Lite



Mortice Sash Lock & Lever Handle



Panic Exit Device

Door Orientation



Door Opening Style - (A)
Right Hand Inside Opening



Door Opening Style - (B)
Right Hand Outside Opening



Door Opening Style - (C)
Left Hand Inside Opening



Door Opening Style - (D)
Left Hand Outside Opening

Colour Shades



RAL 1013
OYSTER WHITE



RAL 5015
SKY BLUE



RAL 3020
TRAFFIC RED



RAL 5012
LIGHT BLUE



RAL 7035
LIGHT GREY



RAL 7040
WINDOW GREY



Ral 7042
TRAFFIC GREY A



RAL 9001
CREME



RAL 9002
GREY WHITE



RAL 9003
SIGNAL WHITE



RAL 9010
PURE WHITE



RAL 9016
TRAFFIC WHITE

Vision Lite Options



No View Glass



Rectangular View Glass
200x300 mm



Square View Glass
300x300 mm



Narrow View Glass
150x600 mm

FULL GLAZED FIRE DOOR

DOUBLE LEAF

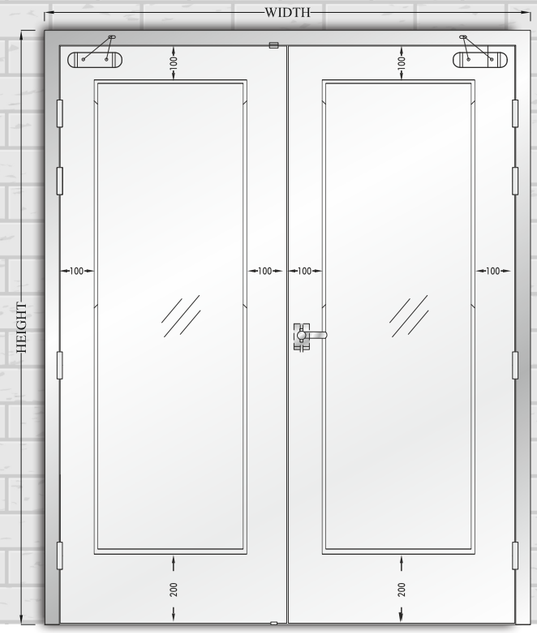

Door Specification :

Door Type	:	Glazed Metal Fire Rated Door
Fire Rating	:	60 mins/120 mins
Shutter Thickness	:	60 mm
Criteria	:	Stability, Integrity & with Insulation Material
Testing Standards	:	BS 476 PART 20-22, IS 3614-2021

Construction Details :

- Steel Frame Profile Design
- Frame Thickness :- 1.6 mm Galvanized Steel
- Shutter Sheet Thickness :- 1.6 mm Galvanized Steel
- Glass :- 2hrs. Fire rated clear glass
- Shutter Infill Insulation :- Mineral Wool Insulation

Recommended Finishes :

- Powder Coating in desired RAL Shade Code
- Wooden Finish



Inner Filling



WOOL INSULATION

Anchor Cover



Typical Detail Of Jamb



Frame Section



DOUBLE REBATE 1.6MM STEEL FRAME

Door Handing



Door Hardware



S.S. BB Hinges



Mortice Dead Lock



D/H Door Handle



Door Closer



Vision Lite



Mortice Sash Lock & Lever Handle

Door Orientation



Door Opening Style - (A)
Right Hand Inside Opening



Door Opening Style - (B)
Right Hand Outside Opening



Door Opening Style - (C)
Left Hand Inside Opening



Door Opening Style - (D)
Left Hand Outside Opening

Colour Shades



RAL 1013
OYSTER WHITE



RAL 5015
SKY BLUE



RAL 3020
TRAFFIC RED



RAL 5012
LIGHT BLUE



RAL 7035
LIGHT GREY



RAL 7040
WINDOW GREY



Ral 7042
TRAFFIC GREY A



RAL 9001
CREME



RAL 9002
GREY WHITE



RAL 9003
SIGNAL WHITE



RAL 9010
PURE WHITE



RAL 9016
TRAFFIC WHITE

Vision Lite Options



No View Glass



Rectangular View Glass
200x300 mm



Square View Glass
300x300 mm



Narrow View Glass
150x600 mm

SINGLE FIRE DOOR

IRONMONGERY



DOUBLE FIRE DOOR

IRONMONGERY

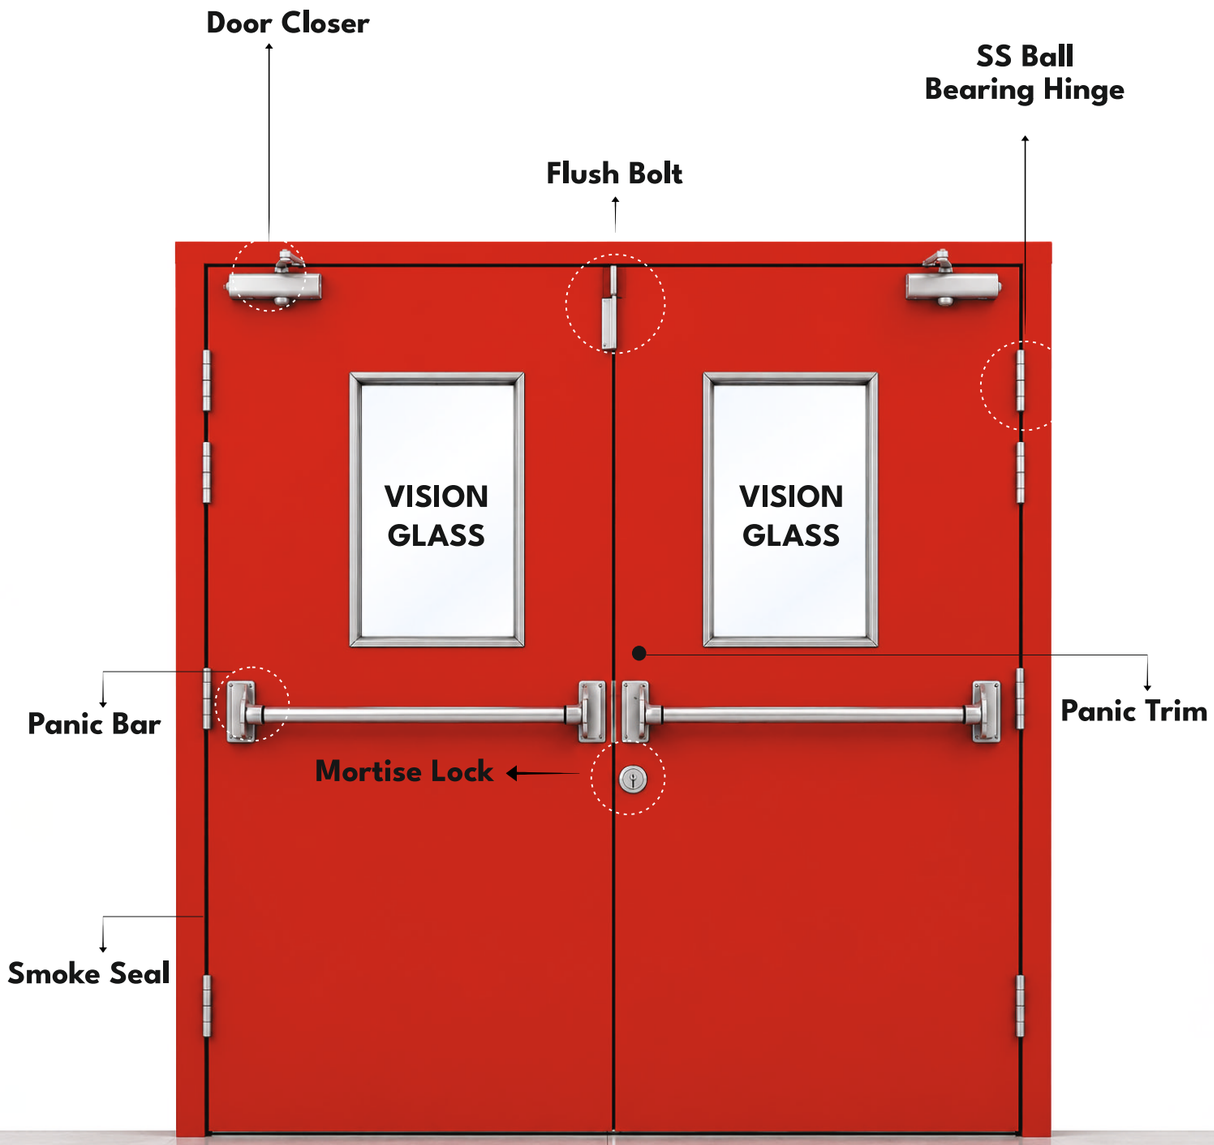

Frame Section of 143x57 Double Rebate



MITERED JOINT-45*

ANCHOR TYPE



FRAME SECTION



Frame Section of 100x57 Single Rebate



BUTT JOINT-90*

MULLION MEMBER



FRAME SECTION



Frame Section of Glazed Door

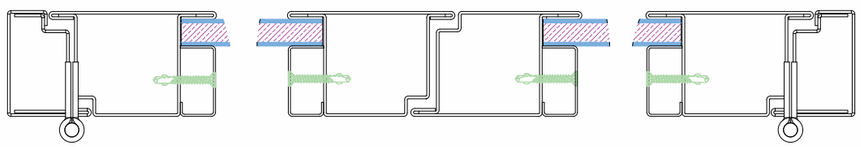

Door LH Side Shutter & Frame

Door Meeting Still

Door RH Side Shutter & Frame

The Above sketches are only indicative, actual products may vary.

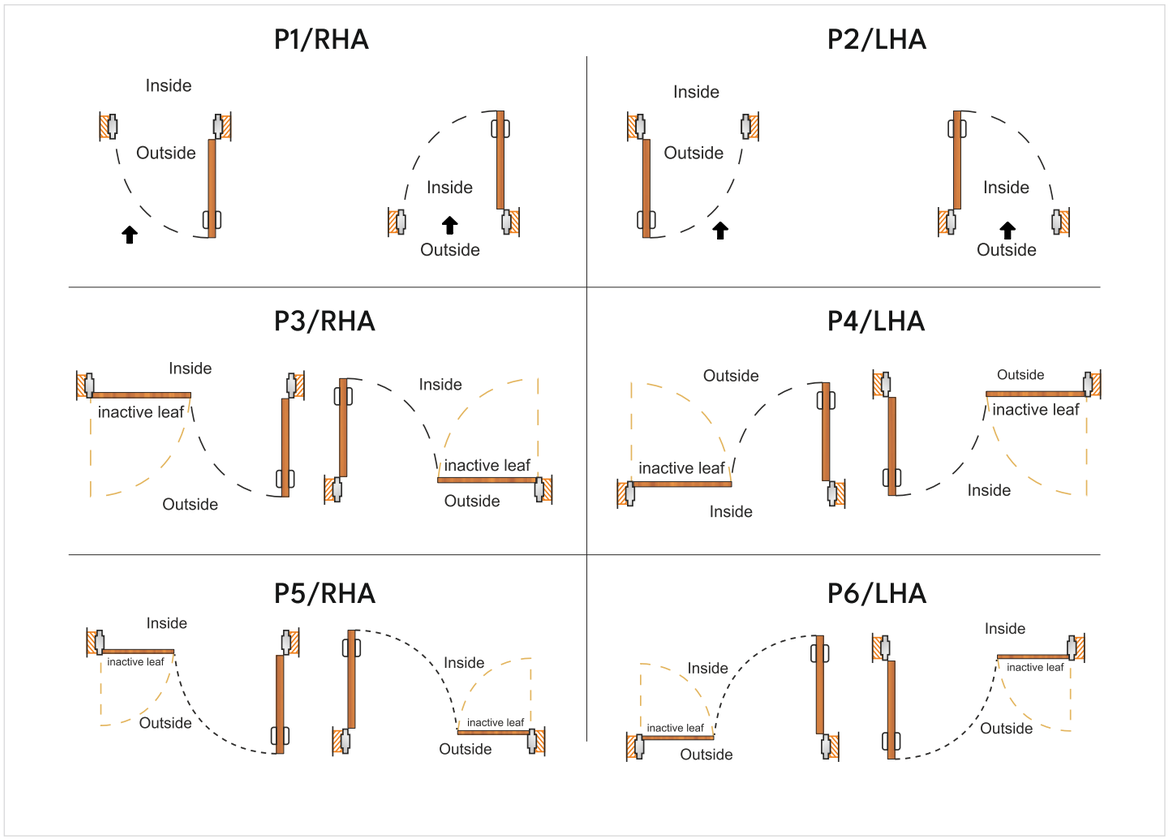

“Hey, Fire!
You can’t pass through
this fire Door!”



FHC DOOR



HOSE REEL CABINET



Aurelius group of Companies

Aurelius
FIRE & SAFETY MALL

BALAJI MARKETING
An Intelligent way to build

We shape your imagination
Aureliusedge
OVERSEAS PVT. LTD.

AURELIUS
INDUSTRIES LLP

AUREX

AURELIUS FIRE DOOR LLP